

M12 Power female 0° S-cod. screw terminal4-pol., max. 1,5mm², 8 - 10mm

Female straight

M12, 4-pole

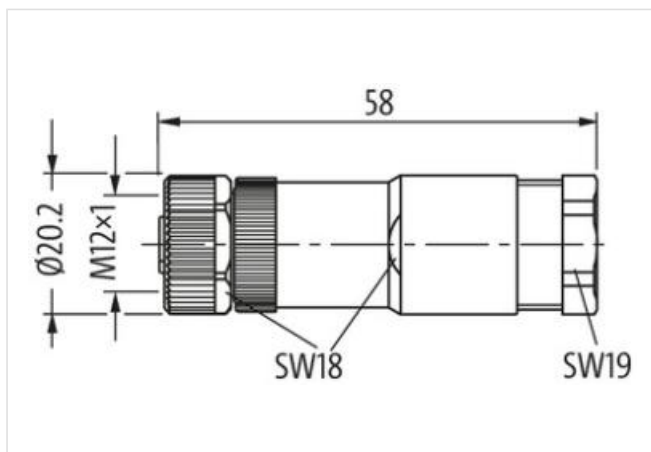
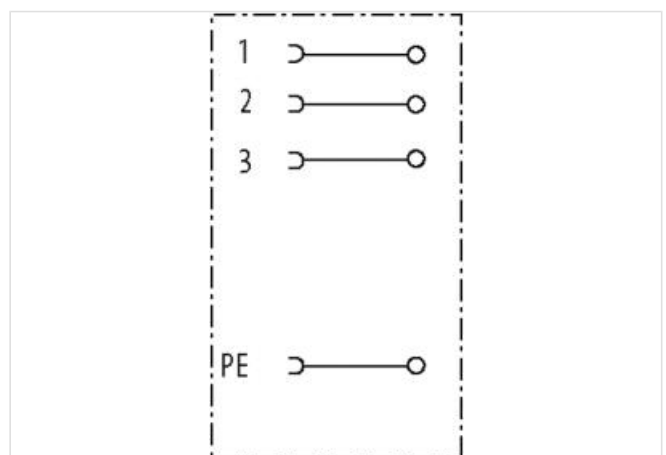
S-coded

Screw terminals

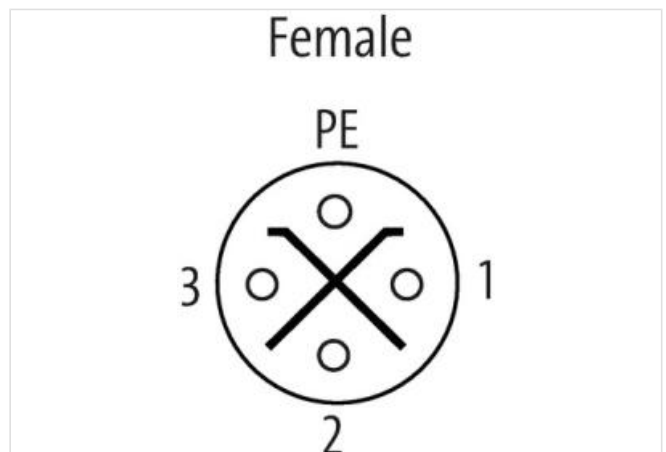
Sealing range (cable Ø): 8...10 mm

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet

**Side 1**

Family construction form	M12P
Coding	S
Material contact	CuZn

No. of poles 4

Handelsinformasjon	
ECLASS-6.0	27279221
ECLASS-6.1	27260702
ECLASS-7.0	27440102
ECLASS-8.0	27440102
ECLASS-9.0	27440116
ECLASS-10.1	27440102
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ETIM-5.0	EC002635
GTIN	4048879653831
Pakkestørrelse	1
Tolltariffnummer	85366990

Electrical data Supply	
Operating voltage AC max.	600 V
Operating voltage DC max.	600 V
Current operating per contact max.	12 A

Installation	
Cross section connection with wire end ferrule max.	1,5 mm ²
Cross section connection without wire end ferrule max.	2,5 mm ²
Cross section connection with wire end ferrule AWG max.	16 AWG
Cross section connection without wire end ferrule AWG max.	14 AWG

Installation Connection	
Tightening torque	0,6 Nm
Mounting set	M12 x 1
Width across flats	SW18

Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	6 kV
Material group (IEC 60664-1)	III
Overvoltage category (EN 60950-1)	III

Mechanical data Material data	
Coating contact	gold plated
Material housing	PA

Mechanical data Mounting data	
Mounting method	inserted, screwed, Shaking protection
Clamping range min.	8 mm
Clamping range max.	10 mm
Height	58 mm
Width	20 mm
Depth	20 mm

Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	85 °C

Important installation notes	
------------------------------	--

Note on strain relief

Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

Note on bending radius

Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.