

B10 Coupling h., low profile, IP65

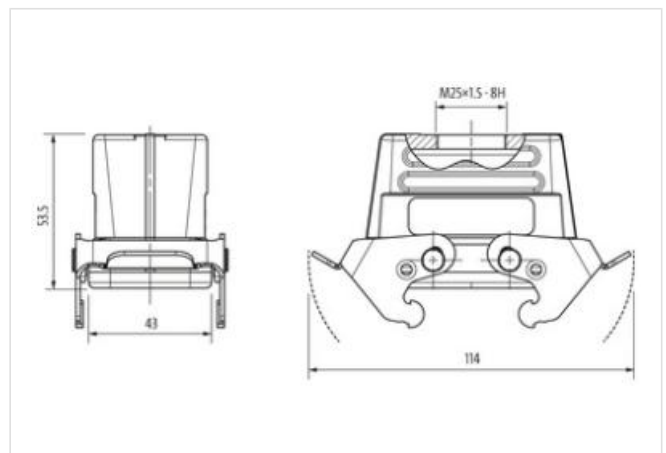
Double locking lever m., top entry M25

B10
Coupling housing (low)
Double locking lever
IP65

Technical data will be only guaranteed with Murrelektronik components.

[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet

**Handelsinformasjon**

ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-8.0	27440202
ECLASS-9.0	27440202
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
GTIN	4048879644976
Pakkestørrelse	1
Tolltariffnummer	85389099

Installation

Cable outlet straight

Installation | Connection

Mounting set	M25
Mating cycles min.	500

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	inserted, locked, with screw connection

Mechanical data

Housing type Coupling housing

Mechanical data | Material data

Coating housing	powder-coated
-----------------	---------------

Coating locking	verzinkt
-----------------	----------

Material gasket	NBR
-----------------	-----

Material housing	Aluminum die casting
------------------	----------------------

Locking material	Steel
------------------	-------

Mechanical data | Mounting data

Size	B10
------	-----

Height	53,5 mm
--------	---------

Width	43 mm
-------	-------

Depth	114 mm
-------	--------

Looking techniques	Double locking lever
--------------------	----------------------

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
----------------------------	--------

Operating temperature max.	100 °C
----------------------------	--------

Climatic category (EN IEC 60068-1)	40/100/21
------------------------------------	-----------