

B6 Surface mounted h., low profile, IP65

Single locking lever m., side entry M20

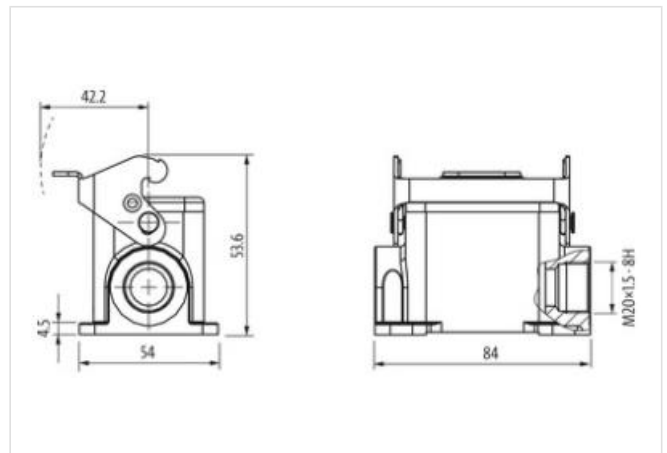
B6

Surface mounted housing (low)

Single locking lever

IP65

Technical data will be only guaranteed with Murrelektronik components.

[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet

Handelsinformasjon

ECLASS-6.0	27279221
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-8.0	27440202
ECLASS-9.0	27440202
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
GTIN	4048879696203
Pakkestørrelse	1
Tolltariffnummer	85389099

Installation

Cable outlet laterally

Installation | Connection

Mounting set	M20
Mating cycles min.	500

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	inserted, locked, with screw connection

Mechanical data

Housing type Surface mounted housing

Mechanical data | Material data

Coating housing	powder-coated
-----------------	---------------

Coating locking	verzinkt
-----------------	----------

Material gasket	NBR
-----------------	-----

Material housing	Aluminum die casting
------------------	----------------------

Locking material	Steel
------------------	-------

Mechanical data | Mounting data

Size	B6
------	----

Height	53,6 mm
--------	---------

Width	54 mm
-------	-------

Depth	84 mm
-------	-------

Locking techniques	Single locking lever
--------------------	----------------------

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
----------------------------	--------

Operating temperature max.	100 °C
----------------------------	--------

Climatic category (EN IEC 60068-1)	40/100/21
------------------------------------	-----------