

A3 Hood, IP65

Single locking lever, side entry M20

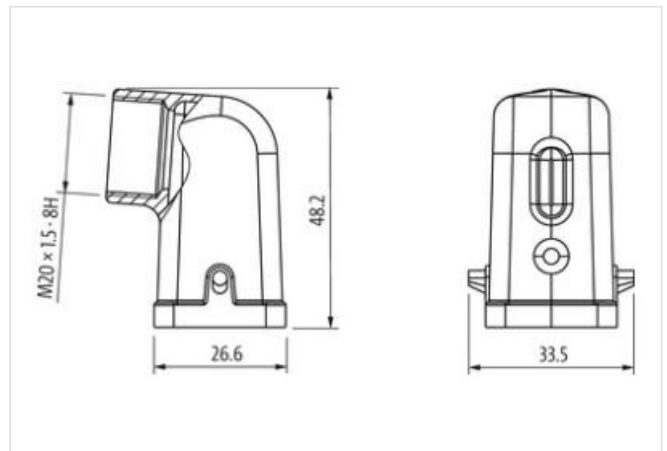
A3

Hood

Single locking lever

IP65

Technical data will be only guaranteed with Murrelektronik components.

[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet

Handelsinformasjon

ECLASS-6.0	27279221
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-8.0	27440202
ECLASS-9.0	27440202
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
GTIN	4048879716802
Pakkestørrelse	1
Tolltariffnummer	85389099

Installation

Cable outlet	laterally
--------------	-----------

Installation | Connection

Mounting set	M20
Mating cycles min.	500

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	inserted, locked, with screw connection

Mechanical data

Housing type	Hood
--------------	------

Mechanical data | Material data

Coating housing	powder-coated
-----------------	---------------

Coating locking	verzinkt
-----------------	----------

Material housing	Zinc die-casting
------------------	------------------

Locking material	Steel
------------------	-------

Mechanical data | Mounting data

Size	A3
------	----

Height	48,2 mm
--------	---------

Width	26,6 mm
-------	---------

Depth	33,4 mm
-------	---------

Locking techniques	Single locking lever
--------------------	----------------------

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
----------------------------	--------

Operating temperature max.	100 °C
----------------------------	--------

Climatic category (EN IEC 60068-1)	40/100/21
------------------------------------	-----------