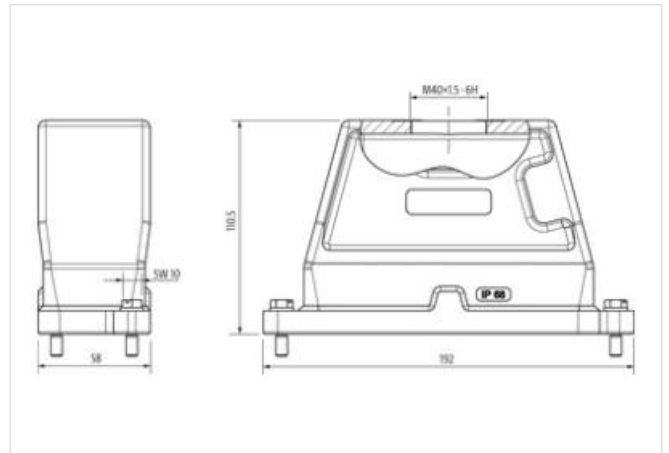


Screw locking, top entry M40

[Link til produkt](#)

**Handelsinformasjon**

Installation

Installation | Connection

Device protection | Electrical

Mechanical data

Murrelektronik A.S. | Christian August Thorings vei 7 | 4033 Stavanger | Fon +47 32 1790-80 | Fax +47 32 1790-90 | shop@murrelektronik.no | shop.murrelektronik.no

Mechanical data Material data	
Coating housing	powder-coated
Material gasket	Silicon
Material housing	Aluminum die casting
Locking material	Stainless steel
Mechanical data Mounting data	
Size	B24
Mounting method	Screw locking
Height	110,5 mm
Width	58 mm
Depth	192 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	125 °C
Climatic category (EN IEC 60068-1)	40/125/21