

PE-Male module, 1-pole, axial screw t.

1000 V, 200 A

Male

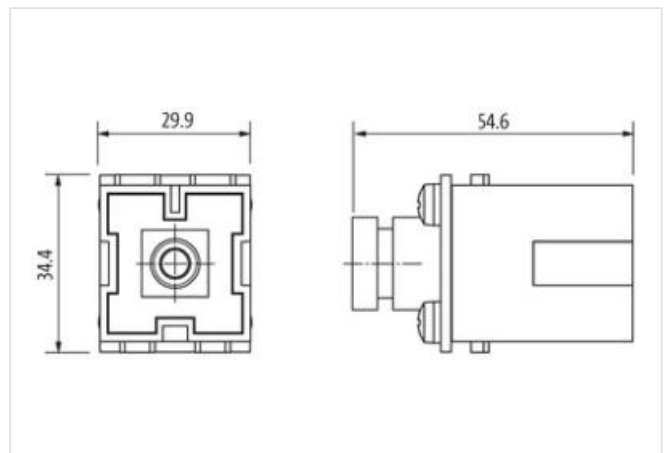
PE

Axial screw connection

Technical data will be only guaranteed with Murrelektronik components.

Axial screw connection only for flexible wires

The clip 70MH-ZZ100-0000000 is needed (4×)

[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet

Handelsinformasjon

ECLASS-6.0	27143424
ECLASS-7.0	27440209
ECLASS-8.0	27440209
ETIM-5.0	EC000438
GTIN	4048879663939
Pakkestørrelse	1
Tolltariffnummer	85366990

Electrical data | Supply

Operating current	200 A
-------------------	-------

Installation

Connection cross section min.	25 mm ²
Connection cross section max.	70 mm ²
AWG number min.	3
AWG number max.	0

Installation | Connection

Stripping length	16 mm
Wire insulation diameter variable max.	max. 12 mm (25 mm ²); 16 mm (40 mm ²)
Connection information	Axial screw connection
Tightening torque	(25...70 mm ²); 9 Nm (70 mm ²)
Tightening torque	8 Nm
Gender	male
Width across flats	SW5
Mating cycles min.	500

Opplysningene i dette databladet er utarbeidet med størst mulig omhu.
 All informasjon gis uten ansvar for eventuelle feil og mangler. 17.05.2024

Murrelektronik A.S. | Christian August Thorings vei 7 | 4033 Stavanger | Fon +47 32 1790-80 | Fax +47 32 1790-90 | shop@murrelektronik.no | shop.murrelektronik.no

Installation Pin assignment	
No. of poles	PE
Device protection Electrical	
Pollution Degree	3
Mechanical data Material data	
Coating contact	silver-plated
Combustibility class (UL94)	V-0
Material housing	PC
Material contact	Brass
Mechanical data Mounting data	
Number of module slots	2
Height	61,1 mm
Width	34,3 mm
Depth	29,3 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	125 °C