

# **Mini (7/8) 5 pole, Male (Ext.) 0°/Female 0°**

PUR 5x1.5 (5x16AWG) bk UL/CSA

Male straight – female straight

7/8" – 7/8", 5-pole

Power cable

USA





Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

## [Link til produkt](#)

### Illustrasjon

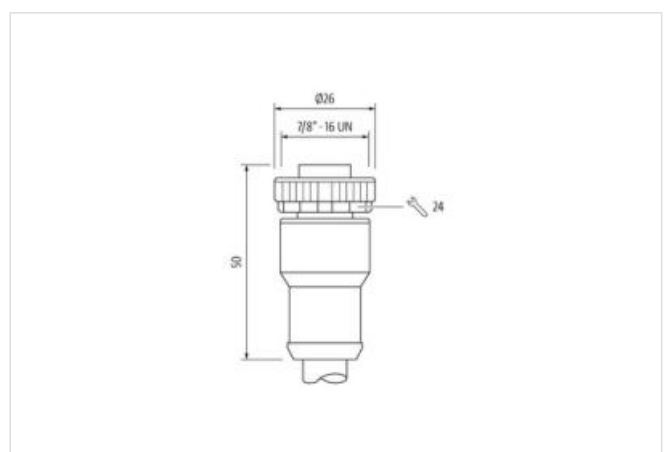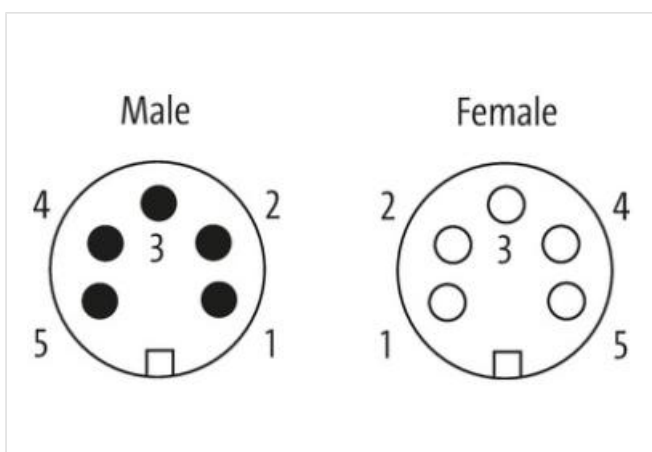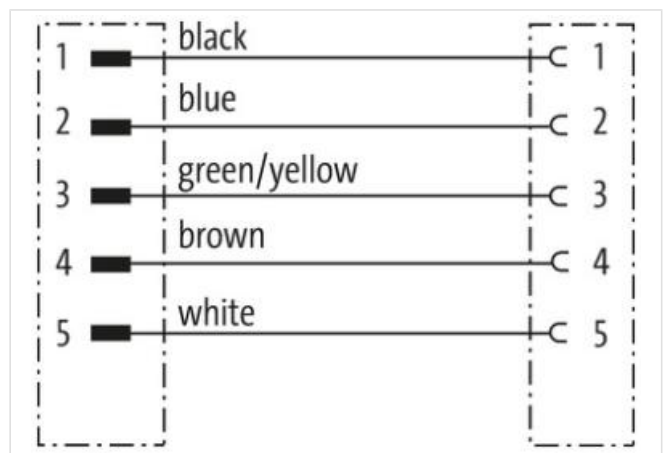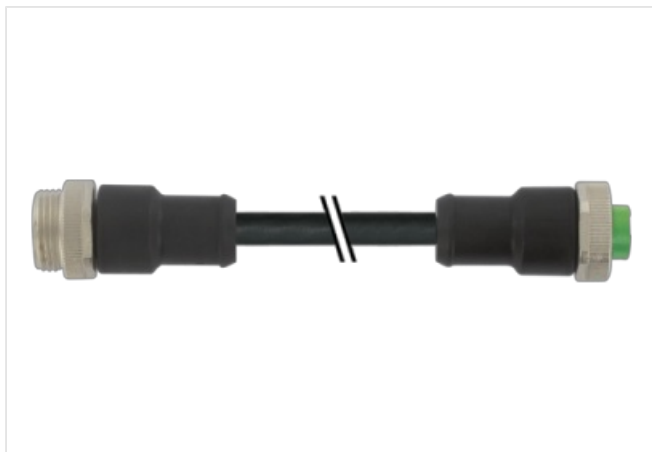

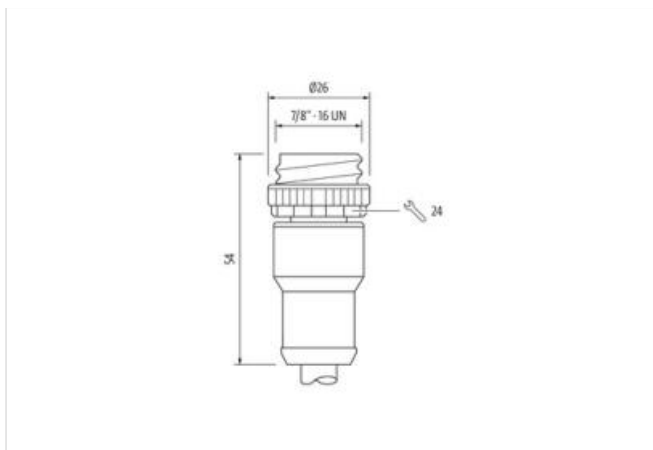

Produktet kan avvike fra bildet



|              |      |
|--------------|------|
| Cable length | 10 m |
|--------------|------|

#### Side 1

|                          |        |
|--------------------------|--------|
| Tightening torque        | 1,5 Nm |
| Family construction form | 7/8"   |
| Thread                   | 7/8"   |
| Width across flats       | SW24   |

#### Side 2

|                   |        |
|-------------------|--------|
| Tightening torque | 1,5 Nm |
| Thread            | 7/8"   |

#### Handelsinformasjon

|                  |               |
|------------------|---------------|
| ECLASS-6.0       | 27279218      |
| ECLASS-7.0       | 27279218      |
| ECLASS-8.0       | 27279218      |
| ECLASS-9.0       | 27060311      |
| ECLASS-10.1      | 27060311      |
| ECLASS-11.1      | 27060311      |
| ECLASS-12.0      | 27060327      |
| ETIM-5.0         | EC001855      |
| GTIN             | 4048879640633 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85444290      |

#### Electrical data | Supply

|                                    |       |
|------------------------------------|-------|
| Operating voltage AC max.          | 600 V |
| Operating voltage DC max.          | 600 V |
| Current operating per contact max. | 9 A   |

#### Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP68              |
| Additional condition protection degree | inserted, screwed |

#### Mechanical data | Material data

|                  |          |
|------------------|----------|
| Coating locking  | Nickeled |
| Material housing | PUR      |

|                        |        |
|------------------------|--------|
| Travel speed (C-track) | 5 Mio. |
|------------------------|--------|