

**Mini (7/8) 5 pole, Male (Ext.) 90°/Female 90°**

PVC 5x16AWG ye UL/CSA, STOOW

Male 90° – female 90°

7/8" – 7/8", 5-pole

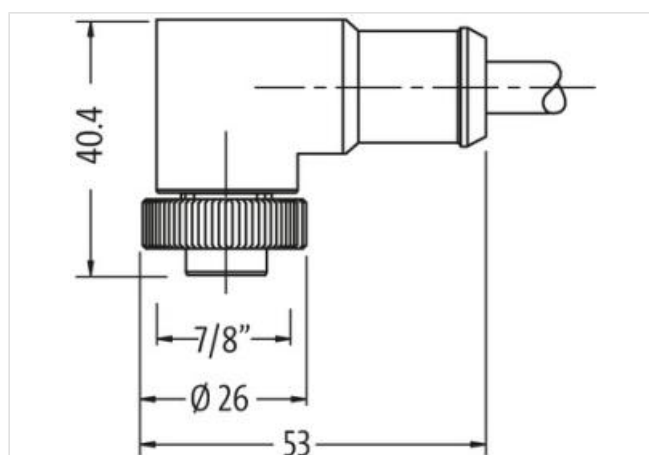
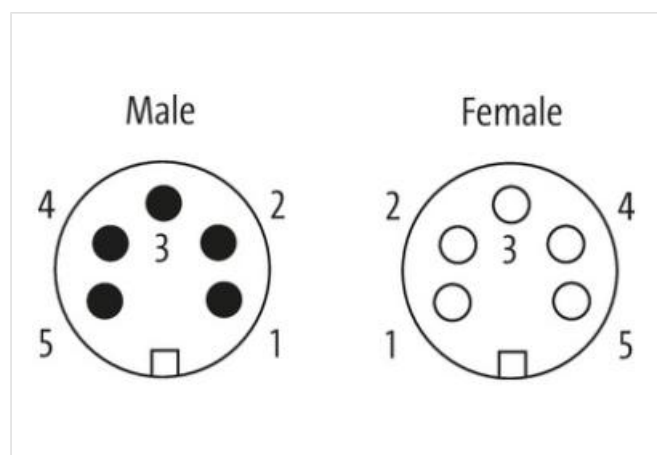
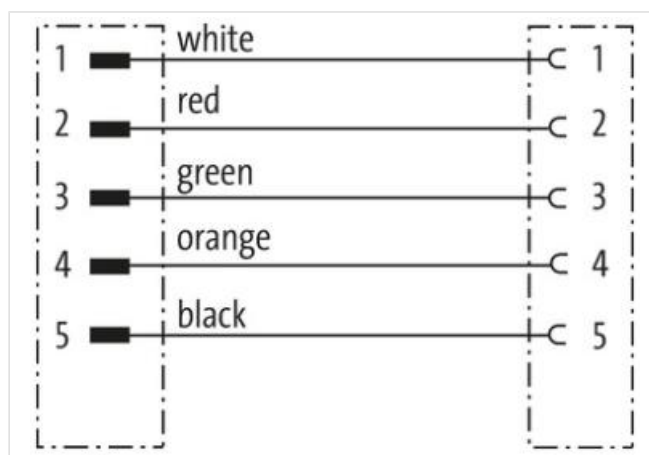
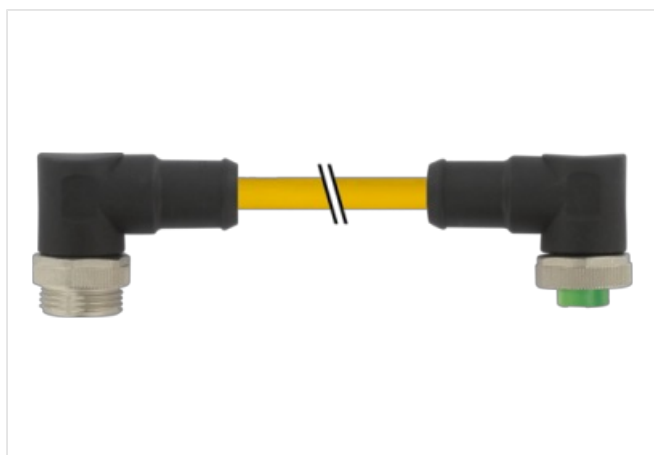
Power cable

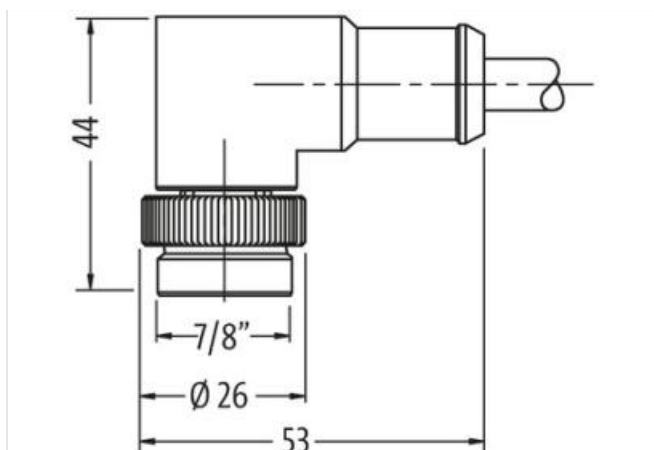
USA

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link til produkt](#)**Illustrasjon**



Produktet kan avvike fra bildet



|              |       |
|--------------|-------|
| Cable length | 7,5 m |
|--------------|-------|

#### Side 1

|                          |        |
|--------------------------|--------|
| Tightening torque        | 1,5 Nm |
| Family construction form | 7/8"   |
| Thread                   | 7/8"   |
| Width across flats       | SW24   |

#### Side 2

|                   |        |
|-------------------|--------|
| Tightening torque | 1,5 Nm |
| Thread            | 7/8"   |

#### Handelsinformasjon

|                  |               |
|------------------|---------------|
| ECLASS-6.0       | 27279218      |
| ECLASS-7.0       | 27279218      |
| ECLASS-8.0       | 27279218      |
| ECLASS-9.0       | 27060311      |
| ECLASS-10.1      | 27060311      |
| ECLASS-11.1      | 27060311      |
| ECLASS-12.0      | 27060327      |
| ETIM-5.0         | EC001855      |
| GTIN             | 4048879635523 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85444290      |

#### Electrical data | Supply

|                                    |       |
|------------------------------------|-------|
| Operating voltage AC max.          | 600 V |
| Operating voltage DC max.          | 600 V |
| Current operating per contact max. | 9 A   |

#### Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP68              |
| Additional condition protection degree | inserted, screwed |

#### Mechanical data | Material data

|                  |          |
|------------------|----------|
| Coating locking  | Nickeled |
| Material housing | PUR      |



|                                 |        |
|---------------------------------|--------|
| No. of bending cycles (C-track) | 2 Mio. |
|---------------------------------|--------|