



EXACT12, 8XM12, 4 POLE

Conn.M12 12-pole


8-way  
4-pole (port 3...8)  
5-pole (port 1+2)  
M12 plug connection, 12-pole  
with LED for digital PNP-signals 24 V DC  
Plastic housings with good resistance against chemicals and oils.

Link til produkt

Illustrasjon

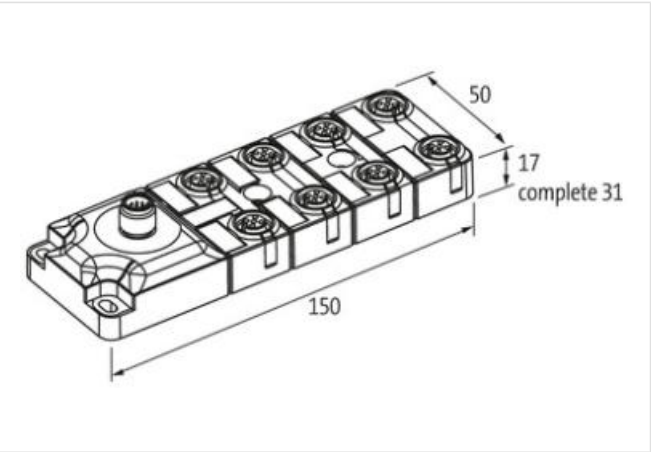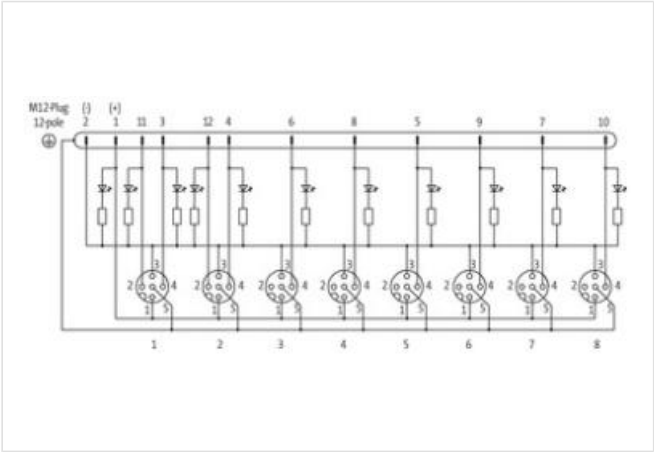

Produktet kan avvike fra bildet

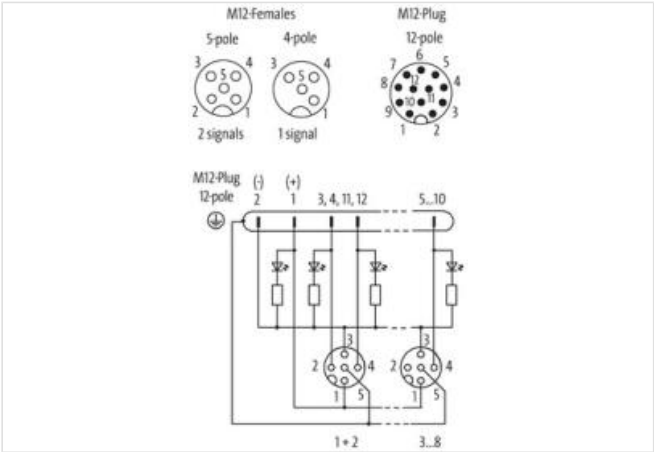

| Handelsinformasjon |          |
|--------------------|----------|
| ECLASS-6.0         | 27143423 |
| ECLASS-6.1         | 27279219 |
| ECLASS-7.0         | 27279219 |

|                  |               |
|------------------|---------------|
| ECLASS-8.0       | 27279219      |
| ECLASS-9.0       | 27440108      |
| ECLASS-10.1      | 27440111      |
| ECLASS-11.1      | 27440111      |
| ECLASS-12.0      | 27440111      |
| ETIM-5.0         | EC002585      |
| GTIN             | 4048879313155 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85369010      |

**Electrical data | Supply**

|                                    |       |
|------------------------------------|-------|
| Operating voltage DC               | 24 V  |
| Current operating per contact max. | 1,5 A |
| Total current max.                 | 1,5 A |

**Device protection | Electrical**

|                                     |            |
|-------------------------------------|------------|
| Degree of protection (EN IEC 60529) | IP65, IP67 |
|-------------------------------------|------------|

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 70 °C  |

**Connection type 2**

|                          |        |
|--------------------------|--------|
| Family construction form | M12    |
| Gender                   | female |
| Color contact carrier    | black  |
| Coding                   | A      |
| No. of poles             | 4      |
| PIN 1                    | +      |
| PIN 2                    | n.c.   |
| PIN 3                    | -      |
| PIN 4                    | NO S 1 |
| PIN 5                    | PE     |
| Family construction form | M12    |
| Gender                   | male   |
| Color contact carrier    | black  |
| Coding                   | A      |
| No. of poles             | 12     |
| PIN 1                    | +      |
| PIN 2                    | -      |