

**EXACT12, 8XM12, 5 POL.**

Backside plug. spring terminals

5-pole

pluggable rear connection

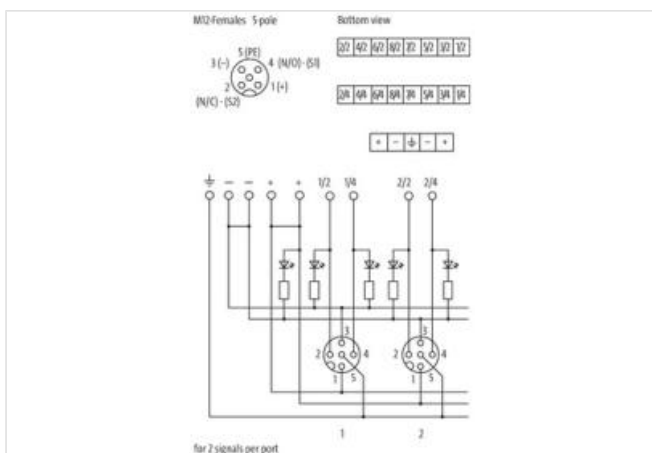
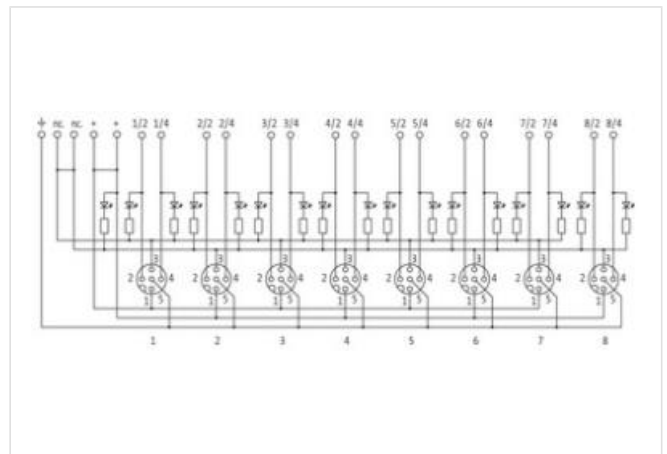
Spring clamp plug-in terminals

with LED for digital PNP-signals 24 V DC

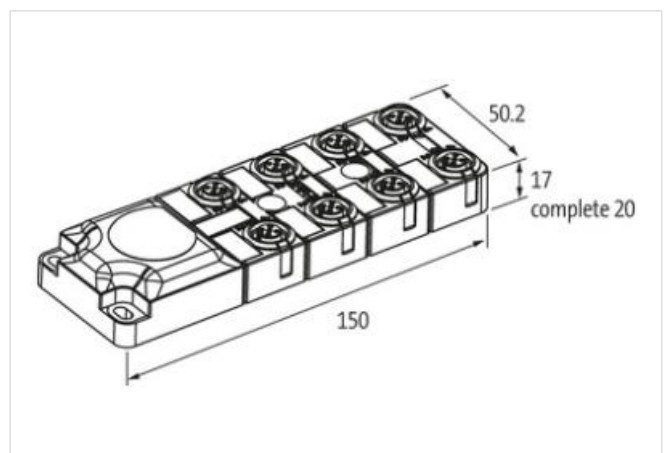
Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

flat gasket included

[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet

**Handelsinformasjon**

ECLASS-6.0

27143423

ECLASS-6.1

27279219

|                  |               |
|------------------|---------------|
| ECLASS-7.0       | 27279219      |
| ECLASS-8.0       | 27279219      |
| ECLASS-9.0       | 27440111      |
| ECLASS-10.1      | 27440111      |
| ECLASS-11.1      | 27440111      |
| ECLASS-12.0      | 27440111      |
| ETIM-5.0         | EC002585      |
| GTIN             | 4048879311205 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85369010      |

**Electrical data | Supply**

|                                               |      |
|-----------------------------------------------|------|
| Operating voltage DC                          | 24 V |
| Current operating per contact max.            | 4 A  |
| Total current at 1 time current feed-in max.  | 8 A  |
| Total current at 2 times current feed-in max. | 16 A |

**Device protection | Electrical**

|                                     |            |
|-------------------------------------|------------|
| Degree of protection (EN IEC 60529) | IP65, IP67 |
|-------------------------------------|------------|

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 70 °C  |

**Connection type 2**

|                          |        |
|--------------------------|--------|
| Family construction form | Cap    |
| No. of poles             | 21     |
| Family construction form | M12    |
| Gender                   | female |
| Color contact carrier    | black  |
| Coding                   | A      |
| No. of poles             | 5      |
| PIN 1                    | +      |
| PIN 2                    | NC S 2 |
| PIN 3                    | -      |
| PIN 4                    | NO S 1 |
| PIN 5                    | PE     |