

**CAP FOR D-BOX M12 8-WAY 5-POLE**

Pot.-sep. 3m PUR/PVC, 16x0,34+5X0.75

for 8-way distribution boxes, 5-pole

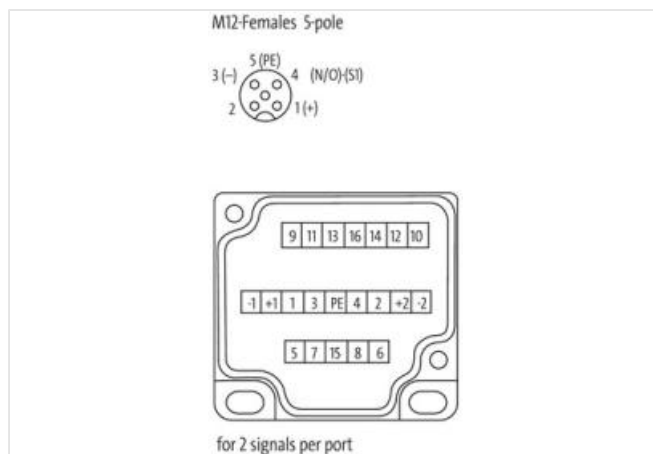
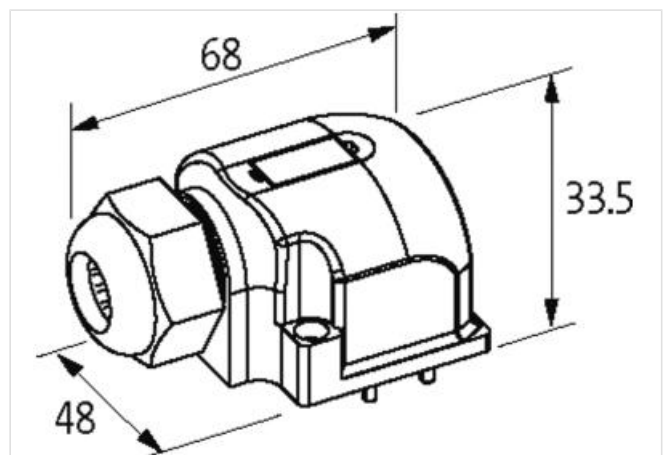
3.0 m

potentially separated

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet

**Handelsinformasjon**

|            |          |
|------------|----------|
| ECLASS-6.0 | 27143423 |
| ECLASS-6.1 | 27279219 |
| ECLASS-7.0 | 27279219 |
| ECLASS-8.0 | 27279219 |

|                  |               |
|------------------|---------------|
| ECLASS-9.0       | 27440108      |
| ECLASS-10.1      | 27440108      |
| ECLASS-11.1      | 27440108      |
| ECLASS-12.0      | 27440108      |
| ETIM-5.0         | EC002585      |
| GTIN             | 4048879053648 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85444290      |

**Electrical data | Supply**

|                    |     |
|--------------------|-----|
| Total current max. | 8 A |
|--------------------|-----|

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -20 °C                     |
| Operating temperature max.             | 80 °C                      |
| Additional condition temperature range | depending on cable quality |

**Installation | Cable**

|                                          |                                                                                                                                                                                                           |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| STOOW style jacket                       | Hybrid, Signal, Power                                                                                                                                                                                     |
| Cable identification                     | 404                                                                                                                                                                                                       |
| Cable Type                               | 2                                                                                                                                                                                                         |
| Jacket Color                             | gray                                                                                                                                                                                                      |
| Type of Certificate                      | cURus                                                                                                                                                                                                     |
| Amount stranding                         | 1                                                                                                                                                                                                         |
| Stranding                                | 5 wires around Core filler twisted                                                                                                                                                                        |
| Amount stranding (type 2)                | 1                                                                                                                                                                                                         |
| Stranding (type 2)                       | 16 wires around Stranding combination twisted                                                                                                                                                             |
| wire arrangement                         | blue 1, brown 1, blue 2, brown 2, green-yellow, (green, red-blue, white, gray-pink, violet, brown-gray, black, gray-white, red, brown-yellow, pink, yellow-white, gray, brown-green, yellow, green-white) |
| Cable weight                             | 257,87 g/m                                                                                                                                                                                                |
| Material jacket                          | PUR                                                                                                                                                                                                       |
| Shore hardness jacket                    | 87 ± 5 Shore A                                                                                                                                                                                            |
| Freedom from ingredients (jacket)        | lead-free, cadmium-free, CFC-free, silicone-free                                                                                                                                                          |
| Outer-diameter (jacket)                  | 12,5 mm                                                                                                                                                                                                   |
| Tolerance outer diameter (sheath)        | ± 5 %                                                                                                                                                                                                     |
| Material inner jacket                    | PVC                                                                                                                                                                                                       |
| Color (inner jacket)                     | gray                                                                                                                                                                                                      |
| Material wire insulation                 | PVC                                                                                                                                                                                                       |
| Amount wires                             | 16                                                                                                                                                                                                        |
| Outer diameter insulation                | 1,4 mm                                                                                                                                                                                                    |
| Outer diameter tolerance core insulation | ± 5 %                                                                                                                                                                                                     |
| Shore hardness wire insulation           | 55 Shore D                                                                                                                                                                                                |
| Material properties wire insulation      | good machinability                                                                                                                                                                                        |
| Ingredient freeness wire insulation      | lead-free, cadmium-free, CFC-free, silicone-free                                                                                                                                                          |
| Amount strands (wire)                    | 19                                                                                                                                                                                                        |
| Diameter of single wires                 | 0,15 mm                                                                                                                                                                                                   |
| Conductor crosssection (wire)            | 0,34 mm²                                                                                                                                                                                                  |
| Traversing distance (C-track)            | 5 m @ 25 °C                                                                                                                                                                                               |
| Material conductor wire                  | Stranded copper wire, bare                                                                                                                                                                                |
| Conductor type (wire)                    | Strand class 5                                                                                                                                                                                            |
| Travel speed (C-track)                   | 5                                                                                                                                                                                                         |

|                                                   |                                                      |
|---------------------------------------------------|------------------------------------------------------|
| Material wire insulation (Power)                  | PVC                                                  |
| Outer diameter wire insulation (Power)            | 2,2 mm                                               |
| Tolerance outer diameter wire insulation (Power)  | ±5 %                                                 |
| Shore hardness wire insulation (Power)            | 43±5 Shore D                                         |
| Material properties wire insulation (Power)       | good machinability                                   |
| Ingredient freeness wire insulation (Power)       | lead-free, cadmium-free, CFC-free, silicone-free     |
| Printing colour wire insulation (Power)           | white (isolation blue), white (isolation brown)      |
| Amount strands wire (Power)                       | 42                                                   |
| Diameter of single wires (Power)                  | 0,15 mm                                              |
| Wire conductor cross section (Power)              | 0,75 mm²                                             |
| Material conductor wire (Power)                   | Stranded copper wire, bare                           |
| Conductor type wire (Power)                       | strand class 6                                       |
| Max. rated voltage (conductor - conductor)        | 300 V                                                |
| Max. rated voltage (conductor - ground)           | 300 V                                                |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                   | 4 A                                                  |
| Loop resistance                                   | 7,8 A                                                |
| Electrical resistance line constant wire          | 57 Ω/km @ 20 °C                                      |
| Electrical resistance coating wire (Power)        | 26 Ω/km @20 °C                                       |
| AC withstand voltage (wire - wire)                | 2 kV @ 60 s                                          |
| Power frequency withstand voltage (wire - jacket) | 2 kV @ 60 s                                          |
| Min. operating temperature (static)               | -30 °C                                               |
| Max. operating temperature (fixed)                | 80 °C                                                |
| Operating temperature min. (dynamic)              | -5 °C                                                |
| Operating temperature max. (dynamic)              | 70 °C                                                |
| Flame resistance                                  | UL 1581 § 1100 FT2   UL 1581 § 1090   IEC 60332-2-2  |
| chemical resistance                               | Good, application-related testing                    |
| Gasoline resistance                               | Good, application-related testing                    |
| Oil resistance                                    | DIN EN 60811-404   Good, application-related testing |
| Bending radius (fixed)                            | 5 x Outer diameter                                   |
| Bending radius (dynamic)                          | 10 x Outer diameter                                  |
| Travel speed (C-track)                            | 2 Mio. @ 25 °C                                       |

**Connection type 2**

|                          |                |
|--------------------------|----------------|
| Family construction form | free cable end |
| No. of poles             | 21             |
| Family construction form | M12            |
| Gender                   | female         |
| Color contact carrier    | black          |
| Coding                   | A              |
| No. of poles             | 5              |
| PIN 1                    | +              |
| PIN 2                    | NC S 2         |
| PIN 3                    | -              |
| PIN 4                    | NO S 1         |
| PIN 5                    | PE             |