

**EXACT12 SAFETY, BACKSIDE SOLDERED SPRING TERM.**

P1-4 M12 5-pol. LED, P5-8 M12 4/3-pol. 1:1 no LED

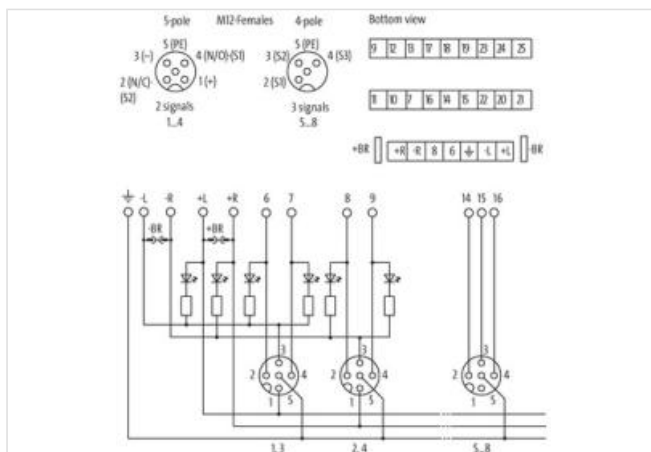
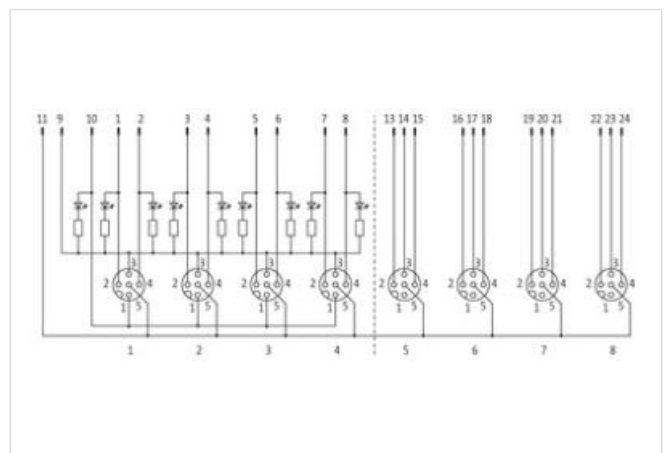
5-pole, 4/3-pole, potentially separated

rear connection

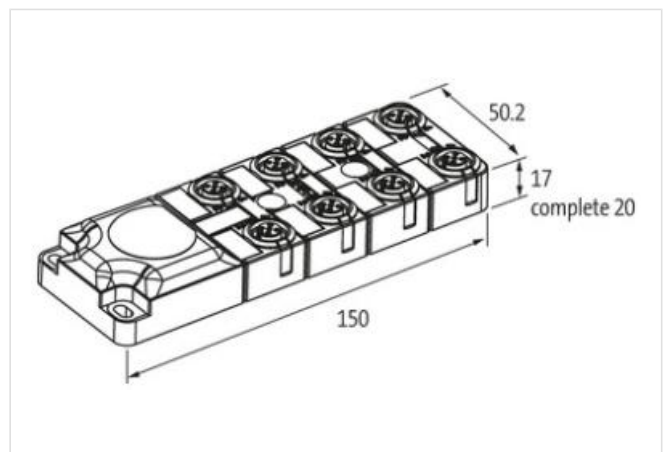
Spring clamp terminals

with LED for digital PNP-signals 24 V DC (port 1...4)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.  
flat gasket included[Link til produkt](#)**Illustrasjon**

Produktet kan avvike fra bildet

**Handelsinformasjon**

|            |          |
|------------|----------|
| ECLASS-6.0 | 27143423 |
| ECLASS-6.1 | 27279219 |
| ECLASS-7.0 | 27279219 |

|                  |               |
|------------------|---------------|
| ECLASS-8.0       | 27279219      |
| ECLASS-9.0       | 27440111      |
| ECLASS-10.1      | 27440111      |
| ECLASS-11.1      | 27440111      |
| ECLASS-12.0      | 27440111      |
| ETIM-5.0         | EC002585      |
| GTIN             | 4048879315623 |
| Pakkestørrelse   | 1             |
| Tolltariffnummer | 85369010      |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage DC               | 24 V |
| Current operating per contact max. | 4 A  |
| Total current max.                 | 8 A  |

**Installation | Connection**

|              |         |
|--------------|---------|
| Mounting set | M12 x 1 |
|--------------|---------|

**Device protection | Electrical**

|                                     |            |
|-------------------------------------|------------|
| Degree of protection (EN IEC 60529) | IP65, IP67 |
|-------------------------------------|------------|

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

**Mechanical data | Mounting data**

|                 |                |
|-----------------|----------------|
| Mounting method | Schraubgewinde |
|-----------------|----------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C  |

**Connection type 3**

|                          |         |
|--------------------------|---------|
| Family construction form | Cap     |
| No. of poles             | 25      |
| Family construction form | M12     |
| Gender                   | female  |
| Color contact carrier    | yellow  |
| Coding                   | A       |
| No. of poles             | 5       |
| PIN 1                    | n.c.    |
| PIN 2                    | S 2     |
| PIN 3                    | S 3     |
| PIN 4                    | S 4     |
| PIN 5                    | PE      |
| Family construction form | M12     |
| Gender                   | female  |
| Color contact carrier    | black   |
| Coding                   | A       |
| No. of poles             | 5       |
| PIN 1                    | 24 V DC |
| PIN 2                    | S 2     |
| PIN 3                    | 0 V     |
| PIN 4                    | S 1     |
| PIN 5                    | PE      |