



MICO FUSE 24 LED FUSE HOLDER 5X20MM 8 CHANNELS

IN: 24 V DC OUT: 24 V / 6 A

MICO FUSE 24 LED  
8 channels  
Total current: max. 40 A

[Link til produkt](#)

Illustrasjon

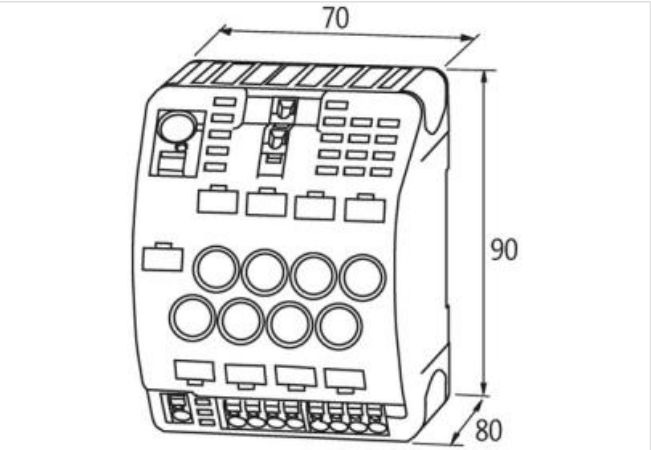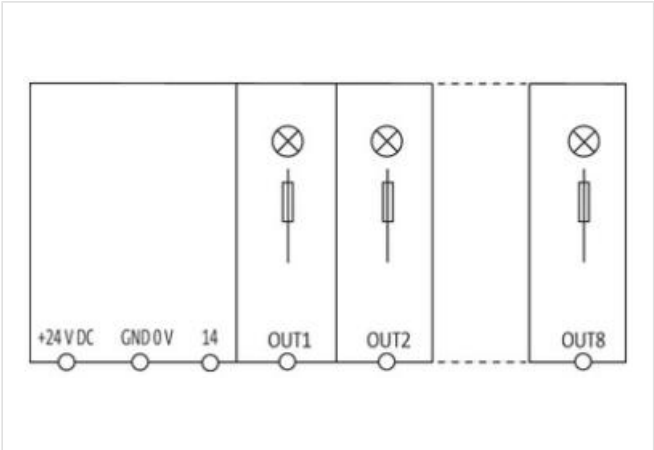

Produktet kan avvike fra bildet



| Handelsinformasjon |          |
|--------------------|----------|
| ECLASS-6.0         | 27371802 |
| ECLASS-6.1         | 27142107 |
| ECLASS-7.0         | 27142121 |
| ECLASS-8.0         | 27142121 |
| ECLASS-9.0         | 27142121 |
| ECLASS-10.1        | 27142121 |
| ECLASS-11.1        | 27142121 |

|                                                                |                                |
|----------------------------------------------------------------|--------------------------------|
| ECLASS-12.0                                                    | 27142121                       |
| ETIM-5.0                                                       | EC001440                       |
| GTIN                                                           | 4048879335263                  |
| Pakkestørrelse                                                 | 1                              |
| Tolltariffnummer                                               | 85363030                       |
| <b>Electrical data   Supply</b>                                |                                |
| Operating voltage DC                                           | 24 V                           |
| Operating voltage DC min.                                      | 18 V                           |
| Operating voltage DC max.                                      | 30 V                           |
| Operating current max.                                         | 6 A                            |
| Total current max.                                             | 40 A                           |
| <b>Electrical data   Output</b>                                |                                |
| Switching current max.                                         | 20 mA                          |
| <b>Installation</b>                                            |                                |
| Connection cross-section inputs max.                           | 16 mm <sup>2</sup>             |
| Connection cross-section outputs min.                          | 0,5 mm <sup>2</sup>            |
| Connection cross-section outputs max.                          | 4 mm <sup>2</sup>              |
| Connection cross-section control inputs / control outputs max. | 2,5 mm <sup>2</sup>            |
| <b>Mechanical data   Mounting data</b>                         |                                |
| Mounting method                                                | geschnappt                     |
| Suitable for mounting type                                     | Mounting rail TH35, (EN 60715) |
| Height                                                         | 90 mm                          |
| Width                                                          | 70 mm                          |
| Depth                                                          | 80 mm                          |
| <b>Environmental characteristics   Climatic</b>                |                                |
| Operating temperature min.                                     | -25 °C                         |
| Operating temperature max.                                     | 55 °C                          |
| Derating from                                                  | 40 °C                          |
| <b>Connection type 5</b>                                       |                                |
| Connection                                                     | Spring clamp terminals FK      |
| Family construction form                                       | terminal                       |
| Gender                                                         | female                         |
| Color contact carrier                                          | green                          |
| No. of poles                                                   | 1                              |
| PIN 1                                                          | 24 V DC                        |
| Connection                                                     | Spring clamp terminals FK      |
| Family construction form                                       | terminal                       |
| Gender                                                         | female                         |
| Color contact carrier                                          | green                          |
| No. of poles                                                   | 1                              |
| PIN 1                                                          | 0 V                            |
| Connection                                                     | Spring clamp terminals FK      |
| Family construction form                                       | terminal                       |
| Gender                                                         | female                         |
| Color contact carrier                                          | green                          |
| No. of poles                                                   | 2                              |
| PIN 1                                                          | n.c.                           |
| PIN 2                                                          | 14                             |
| Connection                                                     | Spring clamp terminals FK      |
| Family construction form                                       | terminal                       |
| Gender                                                         | female                         |

|                          |                           |
|--------------------------|---------------------------|
| Color contact carrier    | green                     |
| No. of poles             | 4                         |
| PIN 1                    | Out 1                     |
| PIN 2                    | Out 2                     |
| PIN 3                    | Out 3                     |
| PIN 4                    | Out 4                     |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 4                         |
| PIN 1                    | Out 5                     |
| PIN 2                    | Out 6                     |
| PIN 3                    | Out 7                     |
| PIN 4                    | Out 8                     |