



Article discontinued since March/2018

Product discontinued

Compact design
with plug relays
8 plugged relays; each 1 NO/NC contact
24 V DC
Diode + LED

[Link til produkt](#)

Illustrasjon

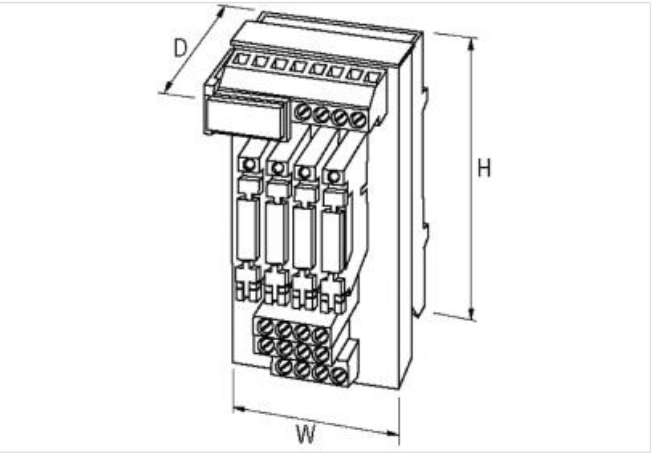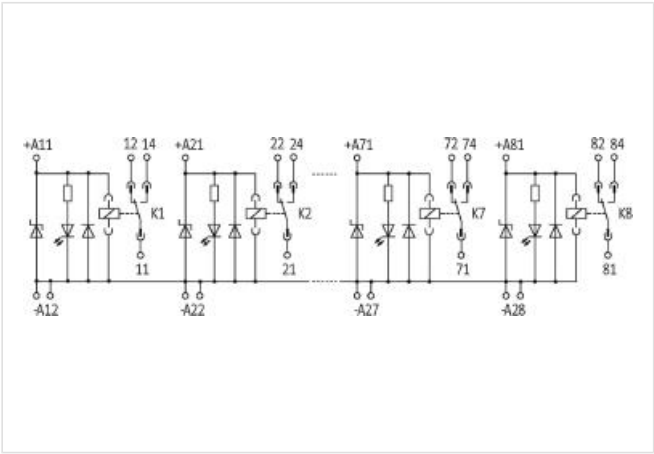

Produktet kan avvike fra bildet



Handelsinformasjon	
ECLASS-6.0	27371001
ECLASS-7.0	27371001
ECLASS-8.0	27371001
ECLASS-9.0	27371001
ETIM-5.0	EC001437

GTIN	4048879411332
------	---------------

Pakkestørrelse	1
----------------	---

Tolltariffnummer	85437090
------------------	----------

Electrical data | Supply

Current consumption	10 mA
---------------------	-------

Electrical data | Output

Utilization category AC-12 (EN IEC 60947-5-1)	6 A @ 24, 6 A @ 110 V, 6 A @ 230 V
---	------------------------------------

Utilization category AC-15 (EN IEC 60947-5-1)	3 A @ 24 V, 3 A @ 110 V, 3 A @ 230 V
---	--------------------------------------

Utilization category DC-13 (EN IEC 60947-5-1)	1 A @ 24 V, 0,2 A @ 110 V, 0,1 A @ 230 V
---	--

Switching voltage AC max.	250 V
---------------------------	-------

Switching voltage DC max.	250 V
---------------------------	-------

Switching current max.	6 A
------------------------	-----

Installation

Connection cross section max.	4 mm ²
-------------------------------	-------------------

Installation | Connection

Connection	Screw terminals SK
------------	--------------------

Connection information	mit einzeln ausgeführten -A2-Anschlüssen
------------------------	--

Device protection | Electrical

Rated surge voltage	4 kV
---------------------	------

Mechanical data | Mounting data

Mounting method	geschnappt
-----------------	------------

Suitable for mounting type	mounting rail, (EN 60715)
----------------------------	---------------------------

Height	86 mm
--------	-------

Width	67,5 mm
-------	---------

Depth	75 mm
-------	-------